

PCT/EP200 4 / 0 1 1 3 4 4

EP 04/11344



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 01 DEC 2004

WIPO

PCT

EPO - DG 1

28. 10. 2004

(76)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed


Stephen Hordley

Dated 12 October 2004

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

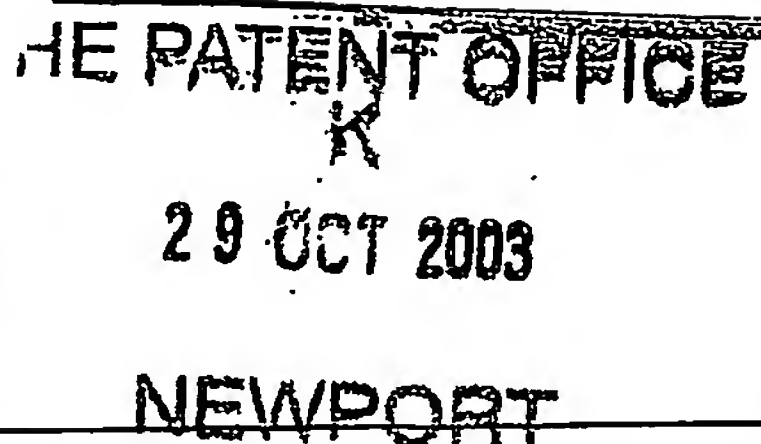

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

2003P11314 GB / P68 / MOM / JBO

2. Patent application number
(The Patent Office will fill in this part)

0325198.0

29 OCT 2003

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

Siemens Aktiengesellschaft
Wittelsbacherplatz 2
München 80333
Germany

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the
country/state of its incorporation

720623010
GERMANY

4. Title of the invention

Communications Apparatus And Method

5. Name of your agent (*if you have one*)

Marc Morgan

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Siemens Shared Services
Intellectual Property Department
Siemens House
Oldbury, Bracknell, Berkshire RG12 8FZ

Patents ADP number (*if you know it*)

8582769001

6. Priority: Complete this section if you are
declaring priority from one or more earlier
patent applications, filed in the last 12 months.

Country Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if
this application is a divisional application or
resulted from an entitlement dispute (*see note f*).

Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- Otherwise, answer NO (see note d).

Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form.

Continuation sheets of this form

Description	8
Claim(s)	3
Abstract	1
Drawing(s)	2 + 2 EN.

0. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant a patent (Patents Form 7/77)	3
---	---

Request for preliminary examination and search (Patents Form 9/77)	1
--	---

Request for substantive examination (Patents Form 10/77)	
--	--

Any other documents
(please specify)

Fee Sheet

1.

I/We request the grant of a patent on the basis of this application

Signature

Date

Marc Morgan
Intellectual Property Department

28.10.2003

2. Name and daytime telephone number of Person to contact in the United Kingdom

Marc Morgan

+ 44 1980 86 3813

Communications Apparatus And Method

5

This invention relates to communications apparatus and a method. It particularly relates to apparatus including a router and a method involving a router using a point to point protocol.

10 Routers are used to interconnect networks and the Internet, for example, is made up of a plurality of networks interconnected by routers. A local area network of interconnected computers in a department may be connected by a router to other local area networks serving other departments in an organisation and also to external networks and the
15 Internet.

A communication is directed by the router by using an Internet Protocol IP address allocated to a particular terminal on the network. It will be appreciated that there are only a limited although large number of
20 possible addresses. In order to cater for the large number of terminals there are global IP addresses for networks and local IP addresses for the terminals. The global addresses are allocated by Internet service providers coordinating with the Internet Assigned Number Authority and the local IP addresses provided from a scheme set up and maintained by
25 the controller of the LAN. In order to route a communication for a terminal on a LAN served by the router, address translation tables are provided to translate from a global IP address to a local address. The advantage of this translation process is that it is relatively straightforward to add new terminals to the LAN or to make other changes requiring an

update to the address. The translation process is referred to as Network Address Translation (NAT) and it is usually carried out by a software entity within the router.

- 5 By using the NAT technique the global addresses are dynamically allocated to a connection. When the communication is finished the address is freed for use by another connection. A further software entity within the router called a connection controller monitors the traffic and if a connection is not used for a particular length of time the connection is
10 timed-out and broken and the address freed for re-allocation when required. The approach adopted is a simple one in which traffic on the link is used to indicate that the link is in use. That traffic however may include packets that are unwanted by a terminal on the LAN and will not be answered when passed to the LAN by the router. For example, a
15 terminal user may have been engaged in browsing the Internet and then discontinued using the browsing application program. Internet frames may still be being delivered which are unwanted. This traffic on the link will result in the connection controller maintaining the connection. Accordingly, this so-called "short-hold" process may lead to an address
20 being held which could be usefully re-allocated.

According to the invention there is provided communications apparatus comprising a router and a connection controller which router, in use, routing data to and from terminals on a local area network and the
25 connection controller controlling connections involving at least one of the terminals, a network address translation translator for translating addresses on incoming data to addresses of terminals on the network; a monitor for monitoring the usage of a network addresses and for sending a message indicative of non-usage to the connection controller; the

connection controller being responsive to the receipt of the message to determine whether to release the connection.

By sending a message to the connection controller when an address is
5 unused the connection will be cleared even when a short-hold process would otherwise be implemented and the link apparently being used by packets arriving at the router which are unwanted.

By releasing the connection sooner than would otherwise be the case
10 connection costs will be reduced. A yet further benefit is that the security of the network is enhanced.

The invention may be used to break more than one PPP-connection. In some arrangements the router may be used to provide connections to
15 more than PPP interface and more than one LAN. The invention allows the use of connection controllers embodied as software objects each controlling a particular PPP connection and each may be made responsive to a message to release the connection.

20 The invention also provides a method.

A specific embodiment of the invention will now be described with reference to the drawing in which:

25 Figure 1 shows a local area network of computer terminals connected by a router operating in accordance with the invention to the Internet; and

Figure 2 shows the router and network of figure 1 in greater detail.

As is shown in figure 1, a local area network LAN 1 is formed of a number of computer terminals 2 to 7 linked by an Ethernet 8. The LAN 1 is connected to the Internet 9 by a router 10. The connections to the terminals 2 to 7 and the Internet are controlled by a software entity within the router 10 called a connection controller 11. The router 10 also includes a network address translation (NAT) translator 12 (sometimes referred to as a NAT box) which hold translation tables in memory (not shown) and an IP router 13.

10 Whilst in this embodiment the router 10 is connected to one LAN respective PPP-interface it will be appreciated that it may serve more than one LAN or more than one PPP-interface. (Each PPP-interface may have its own individual connection controller)

15 The router 10 is connected to a modem 14 and thence via an internet service provider 15 to the Internet 9. The link to the modem 14 is a digital subscriber line (DSL) operating in accordance with a point to point protocol (PPP) and a point to point protocol over Ethernet (PPPoE). (The link may in alternative embodiments be an Integrated Digital Services
20 Network (ISDN) line and in general involve the use of other protocols).

The LAN 1 operates in accordance with Ethernet standard IEEE 802.3. The connection control establishes a connection between a terminal on the LAN 1 and the Internet service provider 15 to permit Internet
25 browsing by an application program running on the terminal or to allow emails to be sent and received. It will be understood that each terminal may have more than one application utilising the connection at any given time. Each application will utilise a logical port. For example, terminal 2 may be running an Internet browser and an email application. The

browser application will be served via a first logical port and the email application served by a second logical port.

5 With the connection made, information in the form of datagrams compatible with TCP/IP protocol flow between the Internet 9 and the ports.

Figure 2 shows the modem 14, router 10 and LAN 1 in more detail. The network address translator 12 allocates to an application an address
 10 to be used for the purpose of the connection. As is shown in figure 2, the terminals have an IP address of the form IP_i , IP_j and IP_k . Each application running on the terminal will require a port. In the figure, the terminals are shown with just one port having an identifier $Port_i$, $Port_m$ and $Port_n$. The terminal address IP_i , IP_j or IP_k is an internal LAN
 15 address set up in accordance with an addressing scheme supported by the LAN operator. Both the IP address and the port addresses are stored in a memory structure within the translator 12 called a Network Address Translation Table (NAT). The table has two fields 16 and 17 which contain the global address information. This is of the form $IP_g Port_{g1to3}$
 20 where g denotes global. The local IP addresses and port numbers are written into the rows of field 17 (and in some applications in other fields). The global session IP address and the corresponding global port numbers are written in the corresponding division of the address field 16.

25

When the connection is established, the internet sender communicating with the terminal 2 utilises an IP address IP_g included in the arriving packets. This is the address that will be used for the rest of the

connection and is therefore called the session IP address. In the examples given this address will be converted into a local IP address and terminate in 1, 2 or 3. Thus for a datagram to arrive from the Internet at the router 10 for forwarding to an application on a terminal it will include the router address for example 100.1.1.5 and a specific port number which is utilized by the router to address a specific local terminal and the corresponding application. The network address translator responds to the global IP/Port address to return the appropriate local IP and port address from field 17 and the IP router 13 sends the data onto the LAN 1 with an appropriate header. Note, that the correct conversion from global to local addresses can be done by the router as the communication is always initiated from the local LAN, so the router stores that initial local addresses and converts these to global addresses, all having the same IP_g but different Port addresses. When the packets return with the global address information, the router can reassign the original local values

The terminals 2 to 7 may be located on one departmental LAN. This grouping may be served by one interface on the router which connects the group to the Internet. The usage of the connection of the group as a whole on this interface will be monitored by the IP router 13. IP packets arriving and leaving the LAN by the interface indicate that the connection is still required.

A further entry in the NAT table 12 is provided to record the time at which the IP router 13 determines that a specific row of tables 16 and 17 has been used for the last time. These are the entries z_x to z_z in the field 17. When the difference between this time and a current time determined by reference to an internal clock exceeds a threshold, the entry (row) is marked as "unused" in the unused flag u_x to u_z . If all of the

rows in the table are unused then the connection controller 11 will be instructed to clear the connection. (This connection being a DSL or ISDN connection.) The table is checked by the IP router 13 in cycles and updated. . In essence, if we consider the period of checking the NAT
 5 table entries as a monitoring period T_c then, n the number of cycles may be derived from the short hold time T_s as follows to mark an entry as unused:

$$n = \text{integer}(T_s/T_c) + 1.$$

10

A NAT entry that has been unused for n cycles is marked as "unused" but not deleted although the connection may already have been broken by the connection controller. It will remain until the NAT lifecycle has expired.

The NAT lifecycle may be greater than T_s in order to support
 15 applications having large timeouts between several data transmissions

When the IP router 13 determines that all the connections to the ports are unused it sends a message M to the connection controller 11 indicating that the link to LAN 1 is not in use. The connection controller 11 is
 20 responsive to this message to break the connection to the ISP 15

The use of the message therefore circumvents the use of the short term hold that may be applied by the connection controller 11 and frees the connection sooner than would otherwise be the case.

25 In an enhancement of the described embodiment, if a terminal reports via standard TCP protocol features to the IP router 13 that it has been sent packets which are not required by an application running on the terminal, then it will trigger the entry z_1 , z_2 or z_3 to be set to unused. This will cater for erroneously sent packets and also packets being sent to a

terminal which has closed down say its internet browsing application when the packets are in transit.

5 Another enhancement, the router will periodically poll the terminals on the LAN. In the event that a terminal is inactive the unused flag for the corresponding row may be set, resulting in the breaking of the connection if all unused flags are set.

10 In the described alternative the router initiates the release of the connection via the message M to the connection control. In an other alternative the router periodically tells the connection control when the last usage of any of the NAT entries (row) took place so that the connection control can control the timeout for the release of the PPP link itself.

15

Whilst in the described embodiment the network translator, the IP router and the connection controller as shown within one routing unit they may be furnished as separate components. More than connection controller may be provided and they may be embodied in software as software
20 objects.

Claims

1. Communications apparatus comprising a router and at least one
5 connection controller which router, in use, routing data to and from
terminals on a local area network and the connection controller
controlling connections involving at least one of the terminals to
another network, a network address translation translator for
10 translating addresses on incoming data to addresses of terminals on
the local area network; a monitor for monitoring the usage of a
network addresses and for sending a message indicative of non-usage
to the connection controller; the connection controller being
responsive to the receipt of the message to determine whether to
release the connection to the another network.
15
2. Apparatus as claimed in claim 1 wherein the network address
translator includes a table of network addresses having associated use
state data.
- 20 3. Apparatus as claimed in claim 1 or 2 wherein the monitor is an IP
router.
4. Apparatus as claimed in any one of claims 1 to 3 wherein the
connection operates in accordance with a point to point
25 protocol(PPP).
5. Apparatus as claimed in claim 4 wherein the connection operates in
accordance with a point to point protocol(PPP) and at least one
additional protocol.

6. Apparatus as claimed in claim 5 wherein the at least one additional protocol is one of a point to point tunnelling protocol (PPTP) or a point to point protocol over Ethernet (PPPoE).

5

7. Apparatus as claimed in any preceding claim wherein the connection controller is an entity on the router.

10

8. Apparatus as claimed in claim 7 wherein the at least one connection controller is a software object.

9. Apparatus as claimed in any preceding claim wherein a plurality of respective connection controllers is provided each controlling a respective connection.

15

10. Apparatus as claimed in any preceding claim substantially as hereinbefore described with reference to and or as illustrated by the drawing.

20

11. A method of controlling a connection to a LAN to another network comprising:

providing a router connected by an interface to ports for applications running on terminals on the LAN;

25

providing a connection controller for controlling the connection between the router and the another network;

monitoring use of the interface to the ports; and

in the event of the interface being unused for the connections to the ports sending a message to the network controller to break the connection between the router and the another network.

5

12. A method as claimed in claim 11 wherein the use of a port is recorded in a network address translator table.

10 10. A method substantially as hereinbefore described with reference to and as illustrated by the drawing.

AbstractCommunications Apparatus And Method

5

A communications apparatus includes a router 10, a network address translator 12 and a connection controller 11. The connection controller 11 governs the connection from LAN 1 to other networks such as the Internet. The LAN serves a number of terminals 2 to 7. In the event that
10 the connection controller determines that the link to a particular LAN is not used it will enter a short term hold process. After a predetermined time has elapse the connection is broken. However, this short term hold process can be circumvented by the network translator maintaining a record of the terminal use (or more particularly a port serving an
15 application on the terminal). In the event that all the terminals are determined as not in use then a message is sent to the connection controller 11 indicating such and the connection is released. This avoids unnecessary connection cost and also enhances security of the LAN 1.

20 Figure 1

25

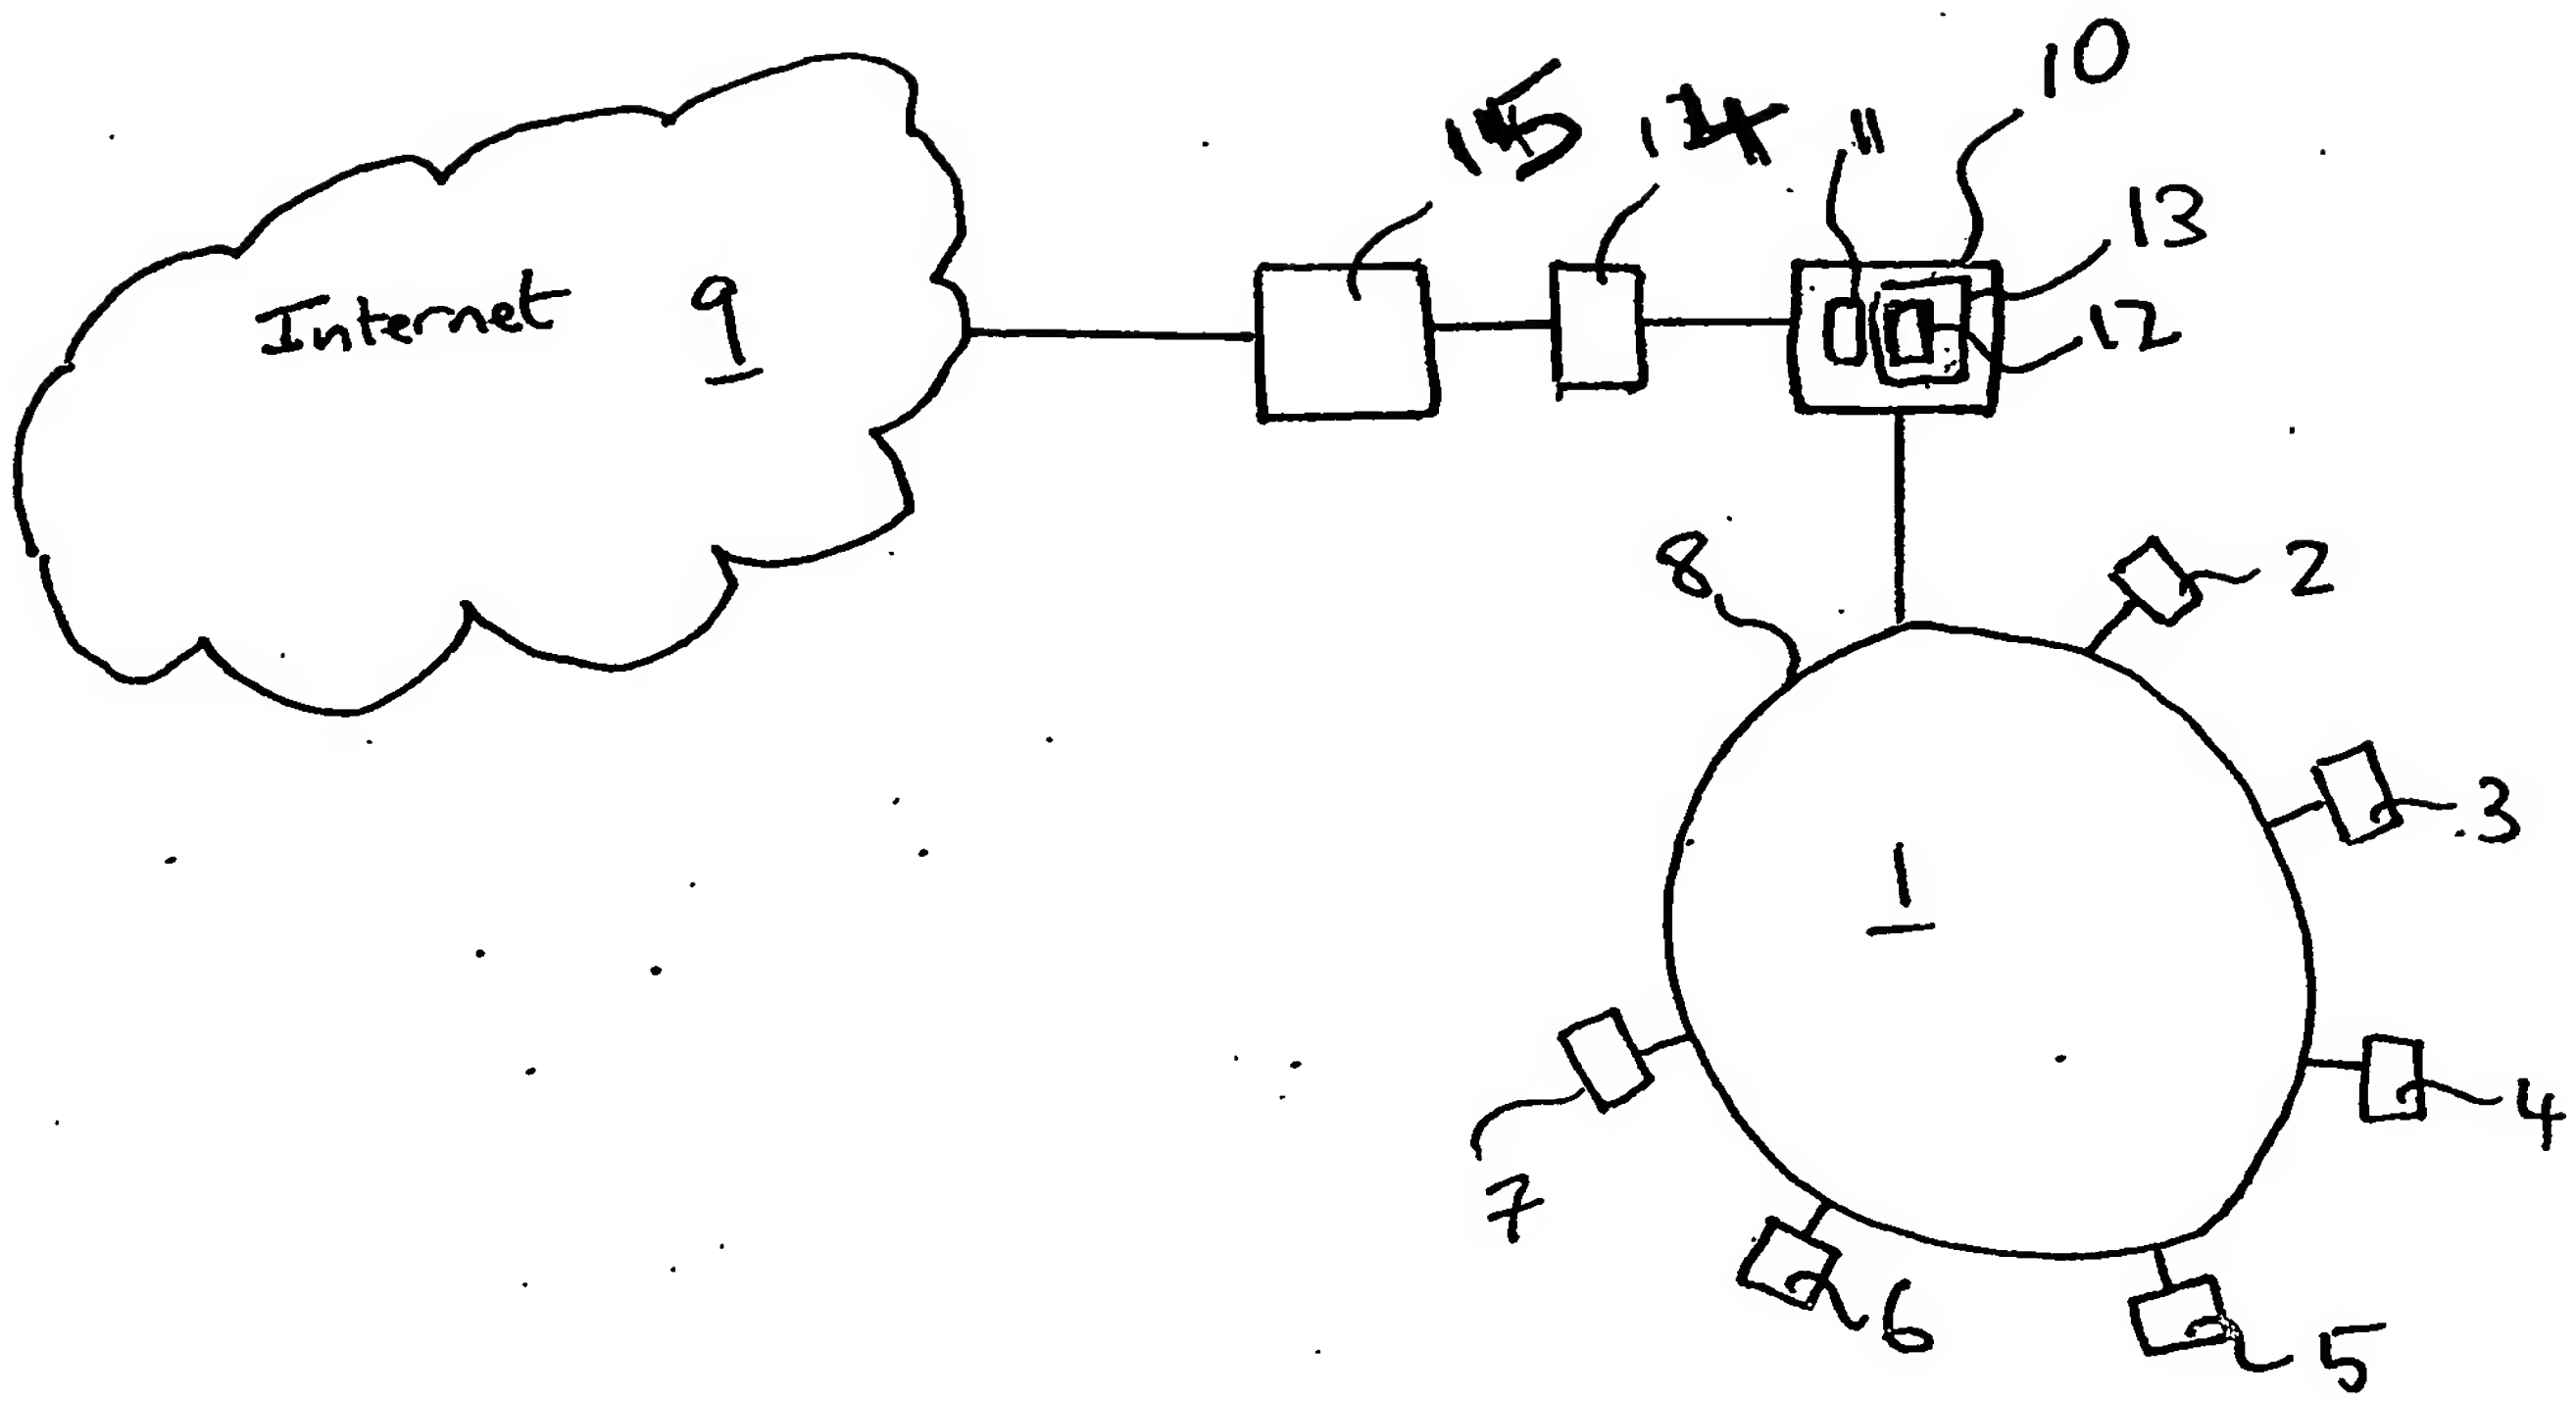


Figure 1


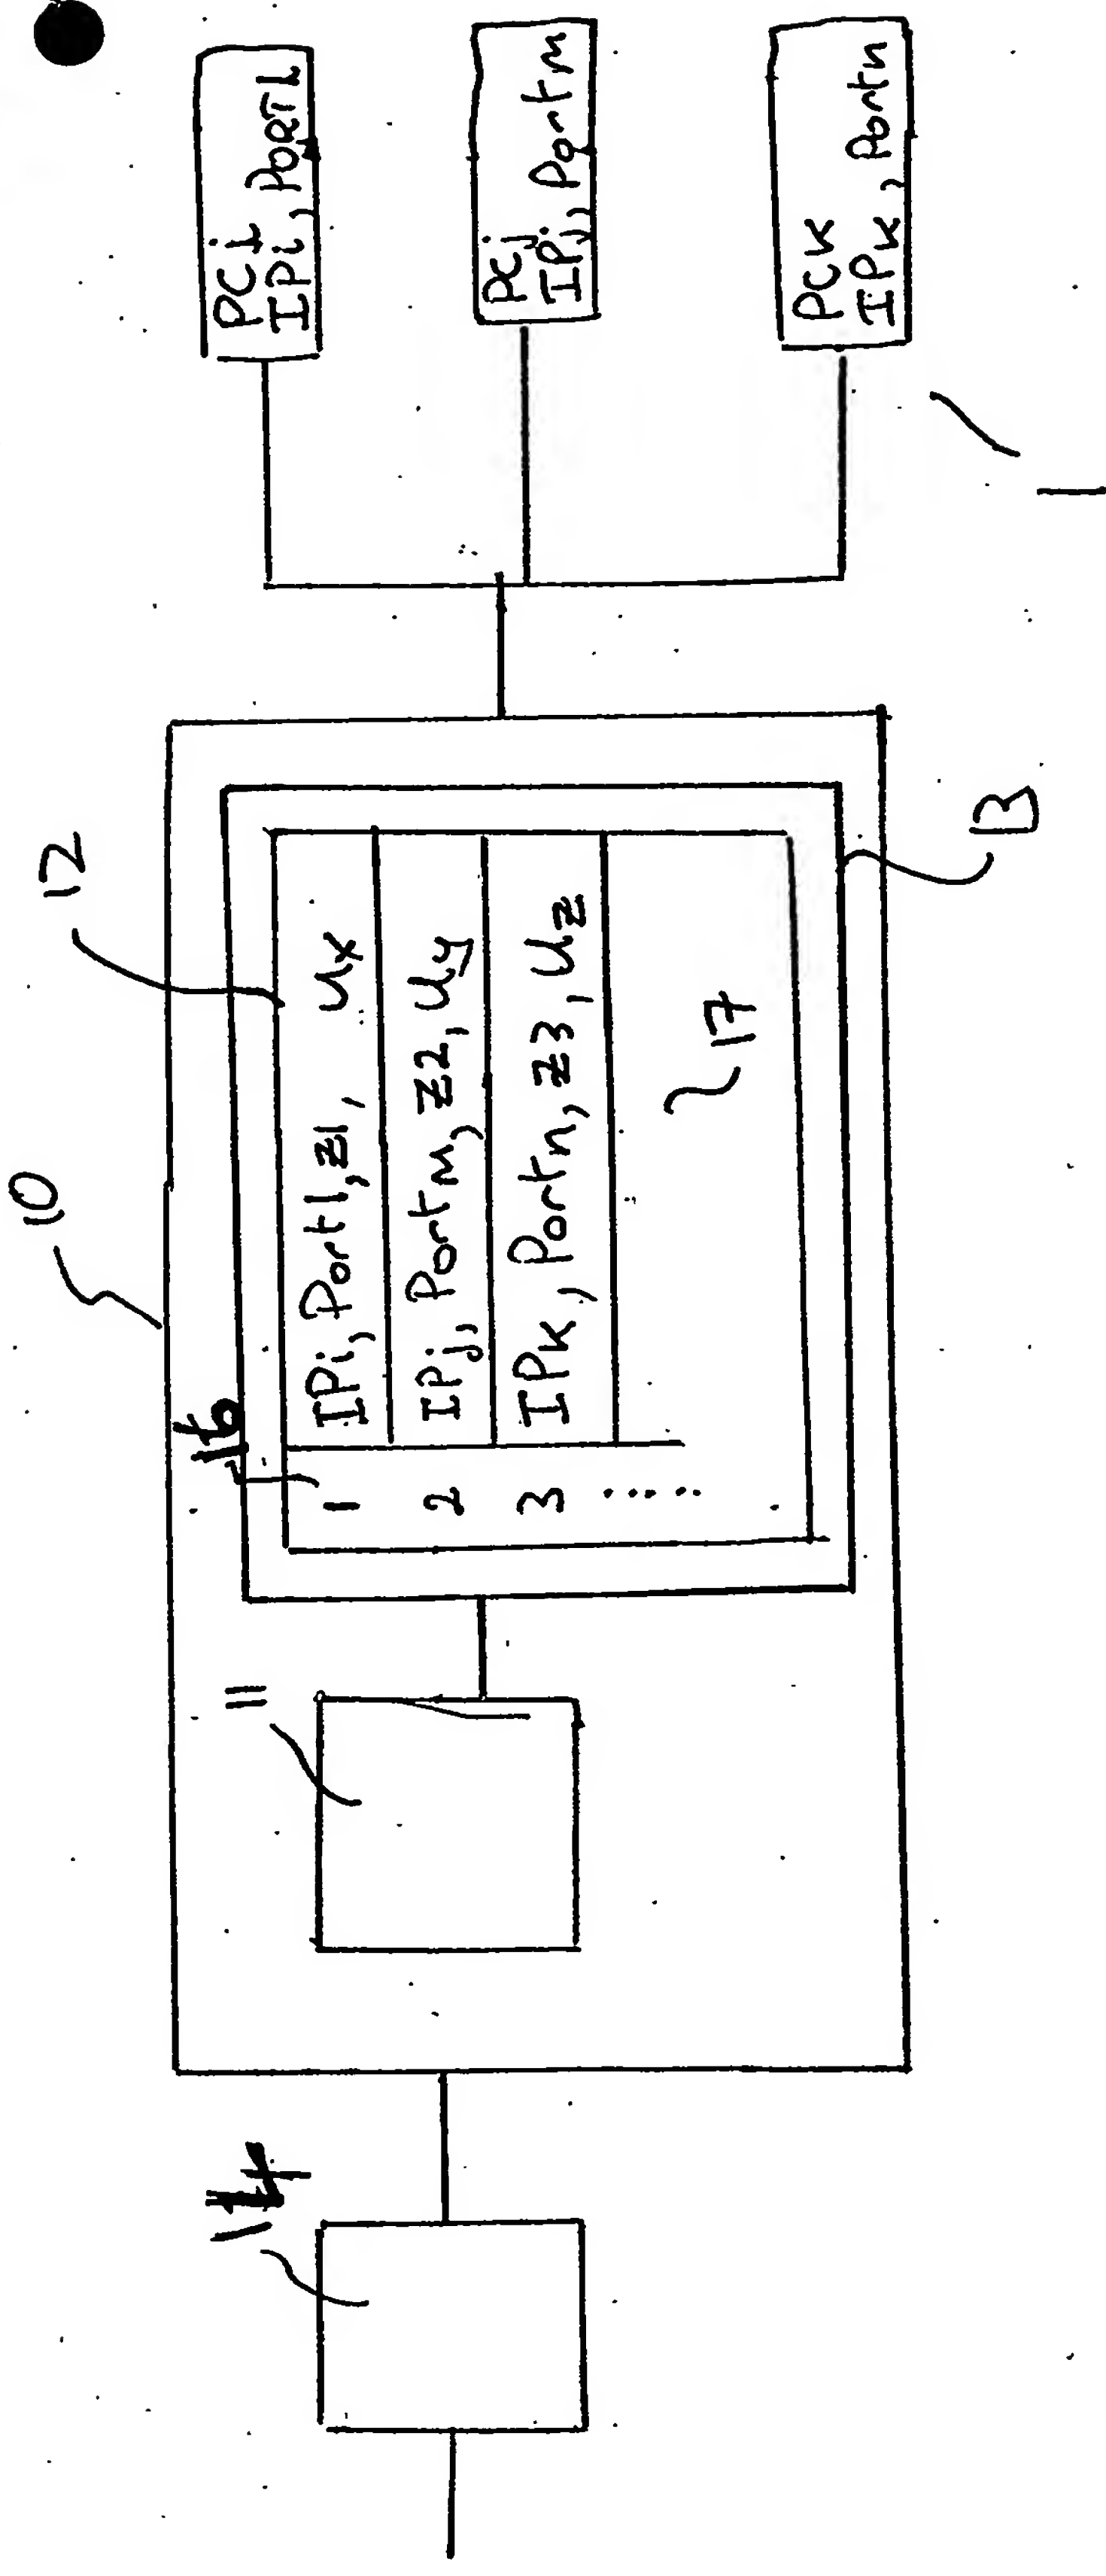


Figure 2

PCT/EP2004/011344

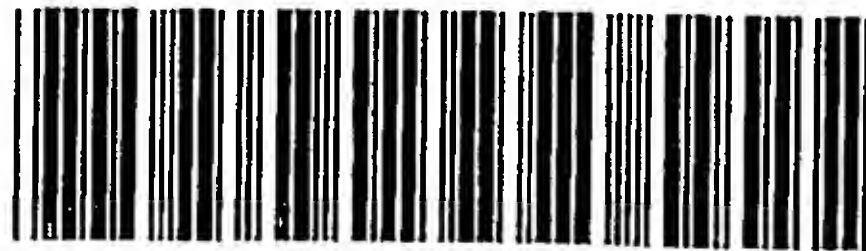

BEST AVAILABLE COPY